



कपिलवस्तु नगरपालिका
KAPILVASTU MUNICIPALITY
नगर कार्यपालिकाको कार्यालय
OFFICE OF MUNICIPAL EXECUTIVE
तौलिहवा कपिलवस्तु
TAULIHAWA KAPILVASTU
लुम्बिनी प्रदेश नेपाल
LUMBINI PROVINCE, NEPAL



मिति : २०८१/०२/१०

पत्र संख्या : ०८०/०८१(पूर्वाधार)

चलानी नं.: १५६३

विषय : दररेट पेश गर्ने सम्बन्धमा।

श्री निर्माण व्यवसायीज्यूहरु


उपरोक्त विषयमा यस आ.व.०८०/०८१ मा तपसील बमोजिमको योजनाहरुको निर्माण कार्य सार्वजनिक खरिद ऐन २०६३ को दफा ४१ को (१) र नगरपालिकाको खरिद नियमावली २०७६ को नियम ८५ को उपनियम (१) बमोजिम सोभै खरिद(कोटेशन) विधिद्वारा गराउनु पर्ने भएकोले यस कार्यालयमा चालु आ.व.को लागि सुचीकृत निर्माण व्यवसायीहरुले BoQ मा उल्लेखित आइटमका कामहरु के कति दररेटमा गर्न सकिन्छ? BoQ मा भरी मिति २०८१ ज्येष्ठ २१ गते कार्यालय समय भित्र पेश गर्नको लागि यो सार्वजनिक सुचना जारी गरिएको ब्यहोरा जानकारीको लागि अनुरोध छ। साथै सोही नियमावलीको उपनियम(३) अनुसार एक आर्थिक वर्षमा एकै पटक वा पटक पटक गरी सीमाभन्दा बढी रकमको वा एउटै ब्यक्ति, फर्म, कम्पनी वा संस्थाबाट एक पटकभन्दा बढी सोभै खरिद गर्न सकिने छैन ब्यवस्था भएकोले सोही बमोजिम गर्नु हुन समेत जानकारीको लागि अनुरोध छ।

तपसील-

- १) बमनी गाउँ भित्रको सडक पी.सी.सी. तथा नाली निर्माण वडा नं.५(दोस्रो पटक)
- २) बिकुली फेदराहट सडक वडा नं.१०
- ३) कम्बडहल पछाडि जित बहादुरको घरदेखी चिन्नी कहाँको घरसम्म माटो ग्राभेल वडा नं.१
- ४) राजेन्द्र पाण्डेको घरदेखी काली मन्दिरसम्म नाली निर्माण वडा नं.६
- ५) अस्पताल देखी शुसील के.सी.को घरसम्म नाली निर्माण वडा नं.६
- ६) केवलपुर जर्लैया सडक निर्माण वडा नं.८

मणेश प्रसाद अर्याल

प्रमुख प्रशासकीय अधिकृत

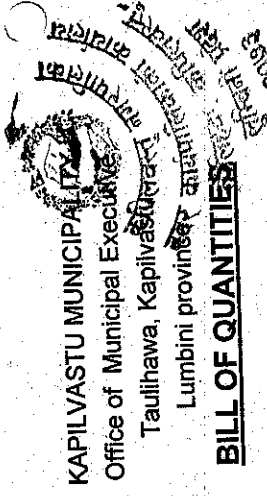

पुनः प्रशासकिय अधिकृत

FY: 2080/081

Date:-2081/02/04

योजनाको नाम र कार्यान्वयन हुने स्थल: राजेन्द्र पाण्डेको घरदेखि कलिमंदिर सम्म नाली निर्माण कपिलवस्तु नगरपालिका वडा नं ६

स्थान:- कपिलवस्तु नगरपालिका वडा नं ६ गोबरी

BILL OF QUANTITIES

SN	Descriptions of Works	Quantity	Unit	Rate in Figure	Rate in Words	Amounts	Remarks
1	side clearance work	1.00	Ls				
2	Earthwork excavation in soft soil for drain and trenches including shoring, strutting, bracing, sheeting and disposal upto 10 m and lift upto 1.5 m etc. all complete as per specification. By Machine	62.30	Cu.m				
3	Dry Flat Brick Soling with sand sealing	138.45	sq.m				
4	Providing and placing machine mixed M10/40 cement concrete for the foundation and footing etc. including compaction, curing, testing and lead 30m. etc. all	13.85	Cu.m				
5	Providing and placing machine mixed M20/40 cement concrete for the foundation and footing etc. including compaction, curing, testing and lead 30m. etc. all complete as per specification	23.09	Cu.m				
6	Providing and fitting 75mm Dai HDPE pipe (NS or S)mark including all complete work	10.00	Rm				
7	Providing , Preparing and installing form work including necessary supports and removing after completion for foundation and footings	219.60	sq.m				
8	(a) using timber (soft wood) - Class F1 finish. [1804, Providing and laying Reinforcement (diameter above 8 mm and upto 16 mm) including cutting, bending, binding, fixing in position and lead 30m. etc. all complete as per specification and drawing.	1034.77	kg				
9	Back filling Filter material behind structure including levelling work	17.36	Cu.m				
10	providing and fitting Project sign board	1.00	No				
						Total Amount	
						Add VAT @ 13% of Total	
						Grand Total with VAT	

Submitted by:

Bidder's Name:

Proprietor

Address:

contact No:

Signature and Date:

Firm's Stamp: